Safety by Engineering
Supply+

+ Collins Youldon

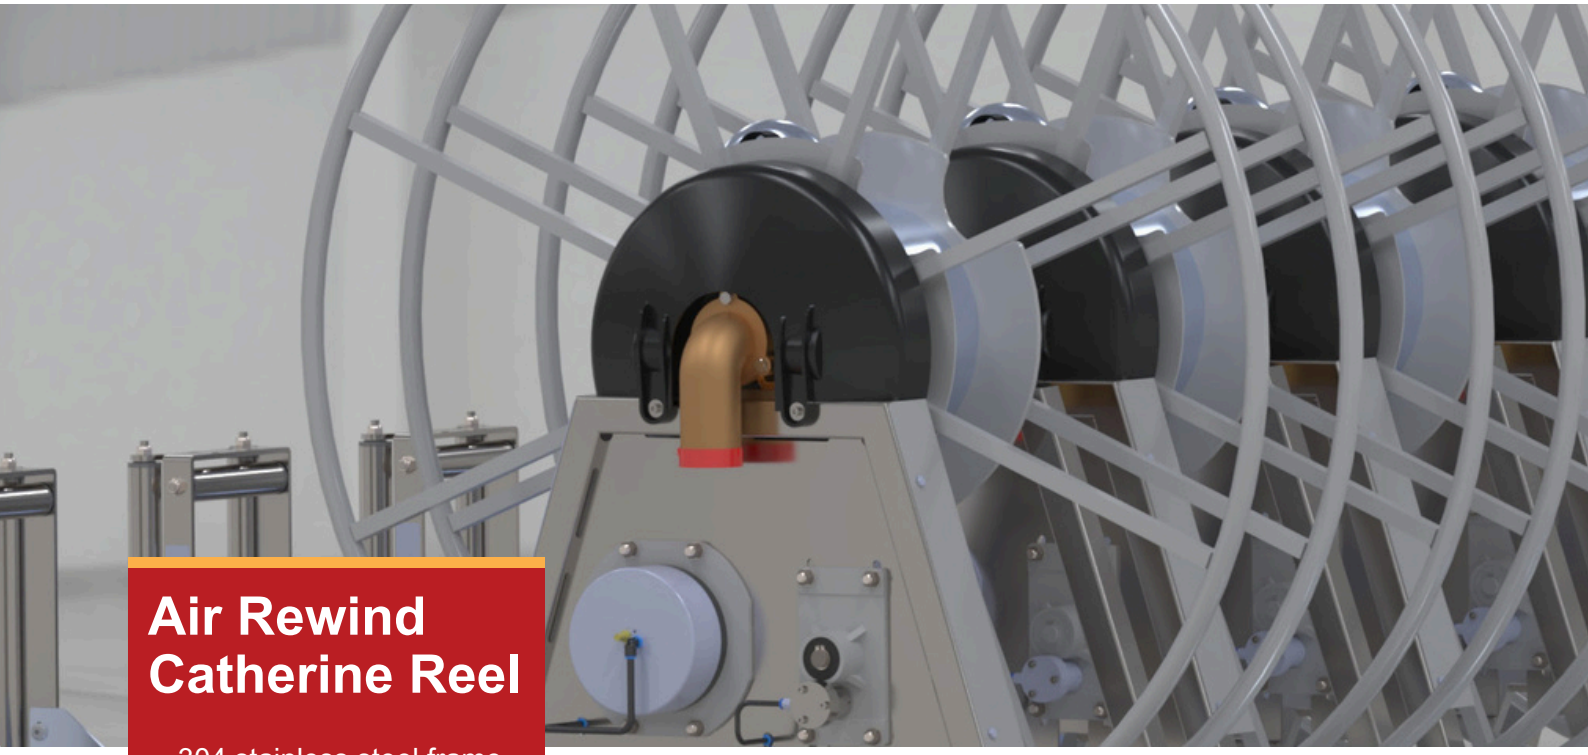

Air Rewind Catherine Reel

- 304 stainless steel frame, aluminium spoked heads.
- 304 stainless steel hose roller guides and aluminium drip tray.
- ATEX certified motor available, or stainless.
- IP67 rated motor for superior performance.
- Reduction in installed weight by 18kg and volume.
- Common mounting and connection points to reduce engineering.

With its improved corrosion resistance and a fully serviceable motor as standard, the new Air Rewind Catherine Reel from +CollinsYouldon delivers quality and reliability for users.

With a 60m hose capacity (35mm NB), variable rewind control with auto-stall device fitted as standard, this reel supports operator safety and efficiency.

Safety by Engineering
Supply+

+Collins Youldon

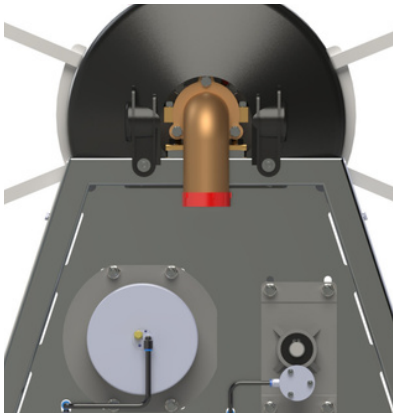

- **Serviceable motor**
- **304 stainless steel frame**
- **Aluminium spokedheads**
- **Improved corrosion resistance**
- **Reduced weight**
- **18kg lighter**

The Air Rewind Catherine Reel from +Collins Youldon can be drawn from either side of a water carrier, tanker, or bowser. It is compatible with low pressure water or foam solution. Fitting between the cab and the tank / body, the +Collins Youldon reel ensures locker space is available for first responder equipment.

Each reel is available with a significant increase in standard features for operators and end-users, such as a fully serviceable motor, shorter chain, improved anti-spool solution, and no clutch or gearbox.

Compatibility

The Air Rewind Catherine Reel is ideal for fire and safety applications. The fluid path is suitable for low pressure water and is intended to be used as a quick attack reel for vehicle protection or general firefighting.

- Fits between cab and body using all available space.
- Frees up underbody lockers for equipment stowage.
- Can be drawn from either side of the vehicle.
- Powered rewind for 60m of hose.

Key features

- Stainless steel 304 frame and aluminium heads for corrosion resistance.
- Interlocked anti-spool mechanism.
- Aluminium drip-tray, stainless roller guides.
- Reversable gooseneck.
- 60m hose capacity.
- Serviceable air rewind motor with spare parts available.
- BSPP(M) gooseneck with flat face.

Optional extras

- 316 stainless steel frame.
- Various drip-tray lengths.
- Stainless steel fluid path.
- Vacuum inlet.
- ATEX certified motor.
- Stainless steel motors.
- 316 stainless steel fluid path. PTFE seals.
- Low temperature (-40ºC).

Installation

Our product takes up less volume and is lighter than its predecessor. With mounting points remaining the same, there is limited re-engineering for integrators. The frame and heads no longer require painting, reducing costs and improving in service quality.

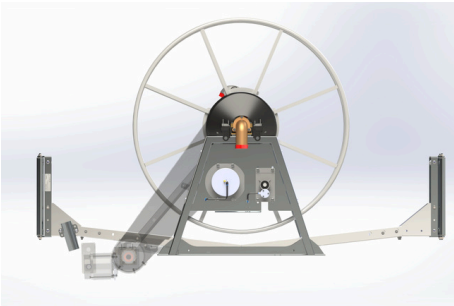

Overlay with alternate 24V rewind

British made

Supply Plus is headquartered in Cambridge, UK, in our 6,000m^2 (64,000 ft^2) facility.

Warranty

Supply Plus is pleased to confirm every reel is available with a manufacturer's 12 month warranty.

Service life

Due to the advanced design and manufacturing techniques, a well serviced and maintained reel could continue running for many years.

Key stats	mm / kg
Width	460
Height	1,340
Length	2,300
Weight	86

Supply Plus Limited
Papworth Everard
Cambridgeshire
CB23 3GY, UK

+44 (0) 1480 832 200
info@supplyplus.com

QUALITY ISO CERTIFIED 9001 · ENVIRONMENTAL ISO CERTIFIED 14001 · SAFETY ISO CERTIFIED 45001

Supply Plus operates a continuous programme of product development
Please check the current version before deploying. E&OE

Copyright © 2026 Supply Plus. All Rights Reserved. CYFARC2605EN